




## Spec Sheet: Lead Free Copper Coupling - No Stop (315)

### Models

- 315-025 1/4" Copper Coupling - No Stop
- 315-050 1/2" Copper Coupling - No Stop
- 315-075 3/4" Copper Coupling - No Stop
- 315-100 1" Copper Coupling - No Stop
- 315-125 1-1/4" Copper Coupling - No Stop
- 315-150 1-1/2" Copper Coupling - No Stop
- 315-200 2" Copper Coupling - No Stop
- 315-250 2-1/2" Copper Coupling - No Stop
- 315-300 3" Copper Coupling - No Stop
- 315-400 4" Copper Cap (Special Order)

### Specifications

- Product is designed to join ASTM B280, ASTM B743 and ASTM B88
- Copper fittings made from UNS C12200 grade of copper and compliant with ASTM B75
- Fittings shall conform to ASME B16.22 and MSS SP104

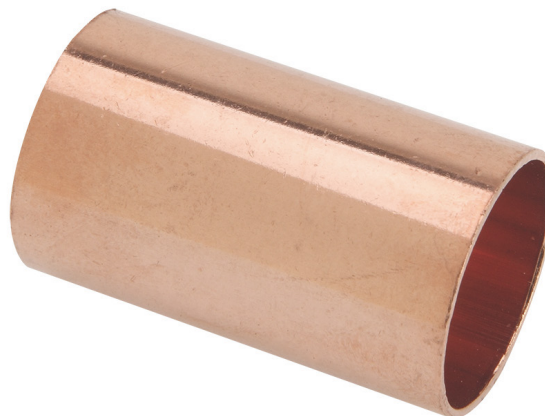

### Dimensions (in)

| Part Number | Nominal Size | OD Size |
|-------------|--------------|---------|
| 315-025     | 1/4          | 3/8     |
| 315-050     | 1/2          | 5/8     |
| 315-075     | 3/4          | 7/8     |
| 315-100     | 1            | 1-1/8   |
| 315-125     | 1-1/4        | 1-3/8   |
| 315-150     | 1-1/2        | 1-5/8   |
| 315-200     | 2            | 2-1/8   |
| 315-250     | 2-1/2        | 2-5/8   |
| 315-300     | 3            | 3-1/8   |
| 315-400     | 4            | 4-1/8   |



**WARNING:** This product can expose you to chemicals including Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
Wash hands after handling.