


Features

- Flexible transition couplings for underground drainage and sewer piping systems.
- For tightening bands, use torque wrenches with 5/16" Hex-Head/Shoulder screw.



Standard

- ASTM C1173

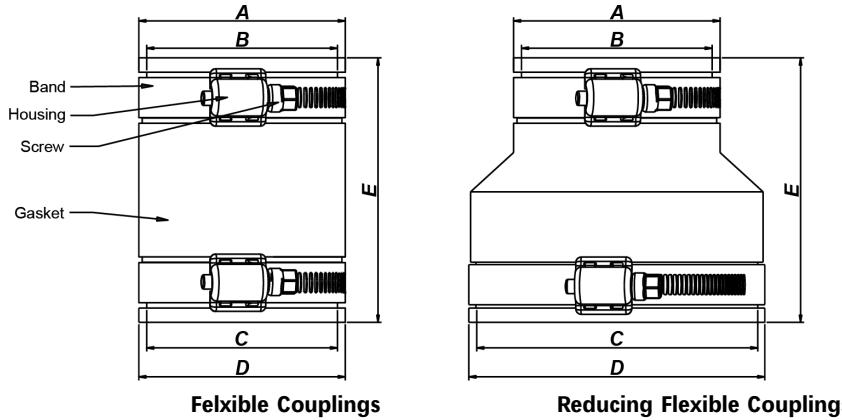

| PART # | Description & Connect | Bands (Clamps) Quantity | A | B | C | D | E | INSTAL TORQUE (inch-lbs) |
|--------|--|-------------------------|------|------|------|------|------|--------------------------|
| FC-150 | 1-1/2" CI/PLASTIC to 1-1/2" CI/PLASTIC | 2 bands | 2.43 | 1.94 | 2.43 | 1.94 | 3.50 | 60 |
| FC-22 | 2" CI/PLASTIC to 2" CI/PLASTIC | 2 bands | 2.90 | 2.41 | 2.90 | 2.41 | 3.50 | 60 |
| FC-33 | 3" CI/PLASTIC to 3" CI/PLASTIC | 2 bands | 4.25 | 3.46 | 4.25 | 3.46 | 4.00 | 60 |
| FC-32 | 3" CI/PLASTIC to 2" CI/PLASTIC | 2 bands | 2.90 | 2.41 | 4.25 | 3.46 | 4.00 | 60 |
| FC-44 | 4" CI/PLASTIC to 4" CI/PLASTIC | 2 bands | 5.17 | 4.50 | 5.17 | 4.50 | 4.00 | 60 |
| FC-415 | 4" CI/PLASTIC to 1-1/2" CI/PLASTIC | 2 bands | 2.43 | 1.94 | 5.17 | 4.50 | 4.00 | 60 |
| FC-42 | 4" CI/PLASTIC to 2" CI/PLASTIC | 2 bands | 2.90 | 2.41 | 5.17 | 4.50 | 4.00 | 60 |
| FC-43 | 4" CI/PLASTIC to 3" CI/PLASTIC | 2 bands | 4.25 | 3.46 | 5.17 | 4.50 | 4.00 | 60 |
| FC-66 | 6" CI/PLASTIC to 6" CI/PLASTIC | 2 bands | 7.32 | 6.60 | 7.32 | 6.60 | 5.75 | 60 |
| FC-64 | 6" CI/PLASTIC to 4" CI/PLASTIC | 2 bands | 5.17 | 4.50 | 7.32 | 6.60 | 5.75 | 60 |
| FC-88 | 8" CI/PLASTIC to 8" CI/PLASTIC | 2 bands | 9.30 | 8.69 | 9.30 | 8.69 | 6.02 | 60 |

Material Specifications:

| | | | |
|--------|------------------------------|---------------|-----------------------------------|
| Gasket | : Elastomeric materials | Housing/Clamp | : Stainless Steel 300 Series |
| Band | : Stainless Steel 300 Series | Screw | : Stainless Steel 305 and or 304L |

